

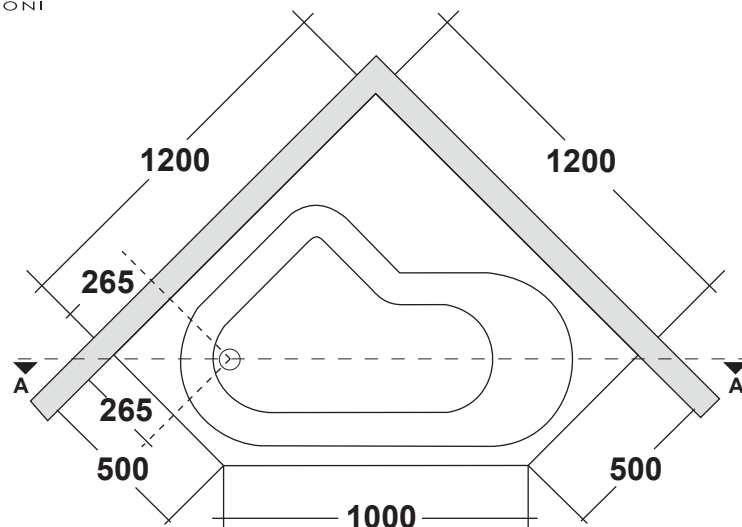


Vista in pianta
plan view

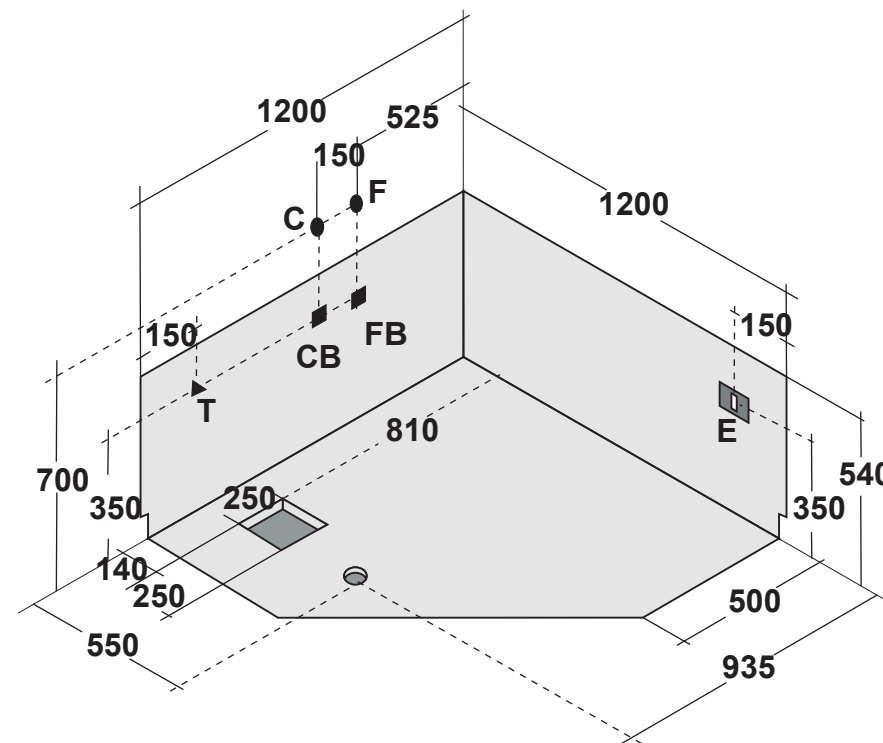

Sezione A/A'
Section A/A'

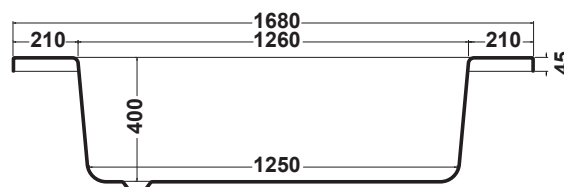

Ingombro vasca proiettato nel muro
Bath overall dimensions as projected on the wall

①	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	COMBINAZIONI RUBINETTERIA																																		
N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE Peso netto: Kg 43 Peso spedizione: Kg 60 Volume spedizione: m3 = 1,057 Contenuto acqua Lt 160	Numero jets: 5	<table><tr><td>V</td><td>HZ</td><td>KW</td><td>A</td></tr><tr><td>220/240</td><td>50/60</td><td>0,78</td><td>4,5</td></tr></table>	V	HZ	KW	A	220/240	50/60	0,78	4,5	<table><tr><td>C : Allaccio acqua calda rubinetteria parete:</td><td>1/2"</td></tr><tr><td>F : Allaccio acqua fredda rubinetteria parete:</td><td>1/2"</td></tr><tr><td>CB : Allaccio acqua calda bordo vasca:</td><td>1/2"</td></tr><tr><td>FB : Allaccio acqua fredda bordo vasca:</td><td>1/2"</td></tr><tr><td>T : Allaccio miscelatore per erogazione da troppopieno:</td><td>1/2"</td></tr><tr><td>S : Allaccio scarico incassato a pavimento:</td><td>1-1/2"</td></tr><tr><td>E : Allaccio elettrico idromassaggio (pressacavo PG 11):</td><td>IPX5</td></tr></table>	C : Allaccio acqua calda rubinetteria parete:	1/2"	F : Allaccio acqua fredda rubinetteria parete:	1/2"	CB : Allaccio acqua calda bordo vasca:	1/2"	FB : Allaccio acqua fredda bordo vasca:	1/2"	T : Allaccio miscelatore per erogazione da troppopieno:	1/2"	S : Allaccio scarico incassato a pavimento:	1-1/2"	E : Allaccio elettrico idromassaggio (pressacavo PG 11):	IPX5	<table><tr><td>C F :</td><td>Rubinetteria parete</td></tr><tr><td>● ●</td><td></td></tr><tr><td>CFT:</td><td>Rubinetteria parete con erogazione troppopieno</td></tr><tr><td>● ● ●</td><td></td></tr><tr><td>CB BF:</td><td>Rubinetteria bordo vasca</td></tr><tr><td>■ ■</td><td></td></tr></table>	C F :	Rubinetteria parete	● ●		CFT:	Rubinetteria parete con erogazione troppopieno	● ● ●		CB BF:	Rubinetteria bordo vasca	■ ■	
V	HZ	KW	A																																			
220/240	50/60	0,78	4,5																																			
C : Allaccio acqua calda rubinetteria parete:	1/2"																																					
F : Allaccio acqua fredda rubinetteria parete:	1/2"																																					
CB : Allaccio acqua calda bordo vasca:	1/2"																																					
FB : Allaccio acqua fredda bordo vasca:	1/2"																																					
T : Allaccio miscelatore per erogazione da troppopieno:	1/2"																																					
S : Allaccio scarico incassato a pavimento:	1-1/2"																																					
E : Allaccio elettrico idromassaggio (pressacavo PG 11):	IPX5																																					
C F :	Rubinetteria parete																																					
● ●																																						
CFT:	Rubinetteria parete con erogazione troppopieno																																					
● ● ●																																						
CB BF:	Rubinetteria bordo vasca																																					
■ ■																																						
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	TAPS COMBINATION																																		
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED Net weight: Kg 43 total weight with package: Kg 60 Volume with package: m3 = 1,057 Water capacity Lt 220	Numero jets: 5	<table><tr><td>V</td><td>HZ</td><td>KW</td><td>A</td></tr><tr><td>220/240</td><td>50/60</td><td>0,78</td><td>4,5</td></tr></table>	V	HZ	KW	A	220/240	50/60	0,78	4,5	<table><tr><td>C : Wall taps outlet for hot water:</td><td>1/2"</td></tr><tr><td>F : Wall taps outlet for cold water:</td><td>1/2"</td></tr><tr><td>CB : Bath edge taps outlet for hot water:</td><td>1/2"</td></tr><tr><td>FB : Bath edge taps outlet for cold water:</td><td>1/2"</td></tr><tr><td>T : Single outlet for mixed water to supply by overflowing:</td><td>1/2"</td></tr><tr><td>S : Drainage outlet istalled in the floor:</td><td>1-1/2"</td></tr><tr><td>E : Power outlet for the wirpool (cabling press box PG 11):</td><td>IPX5</td></tr></table>	C : Wall taps outlet for hot water:	1/2"	F : Wall taps outlet for cold water:	1/2"	CB : Bath edge taps outlet for hot water:	1/2"	FB : Bath edge taps outlet for cold water:	1/2"	T : Single outlet for mixed water to supply by overflowing:	1/2"	S : Drainage outlet istalled in the floor:	1-1/2"	E : Power outlet for the wirpool (cabling press box PG 11):	IPX5	<table><tr><td>C F :</td><td>Wall taps</td></tr><tr><td>● ●</td><td></td></tr><tr><td>CFT:</td><td>Wall taps with water supply by overflowing</td></tr><tr><td>● ● ●</td><td></td></tr><tr><td>CB BF:</td><td>Bath edge taps</td></tr><tr><td>■ ■</td><td></td></tr></table>	C F :	Wall taps	● ●		CFT:	Wall taps with water supply by overflowing	● ● ●		CB BF:	Bath edge taps	■ ■	
V	HZ	KW	A																																			
220/240	50/60	0,78	4,5																																			
C : Wall taps outlet for hot water:	1/2"																																					
F : Wall taps outlet for cold water:	1/2"																																					
CB : Bath edge taps outlet for hot water:	1/2"																																					
FB : Bath edge taps outlet for cold water:	1/2"																																					
T : Single outlet for mixed water to supply by overflowing:	1/2"																																					
S : Drainage outlet istalled in the floor:	1-1/2"																																					
E : Power outlet for the wirpool (cabling press box PG 11):	IPX5																																					
C F :	Wall taps																																					
● ●																																						
CFT:	Wall taps with water supply by overflowing																																					
● ● ●																																						
CB BF:	Bath edge taps																																					
■ ■																																						


DIAMANTE

1200x1200x h 550 mm (160 lt)

GUSCIO E PANNELLO: ACRILICO

SHELL AND SKIRT: ACRYLIC

Finiture gusci e pannelli / Shell and skirt finishes



bianco lucido
glossy white

FINITURE VELVET / VELVET FINISHES			
bianco velvet white velvet	avorio velvet ivory velvet	nero velvet black velvet	grigio chiaro velvet light grey velvet

SISTEMI IDROMASSAGGIO / WHIRLPOOL SYSTEMS (pag. 226)



IDRO+

WHIRLPOOL + CROMOTERAPIA
WHIRLPOOL + CHROMOTHERAPY
Whirlpool jets: n. 5



IDRO-TECNO

WHIRLPOOL + AIRPOOL +
CROMOTERAPIA + DISINFEZIONE
WHIRLPOOL + AIRPOOL
CHROMOTHERAPY + DISINFECTION
Whirlpool jets: n. 5
Airpool jets: n. 12



1200 mm

1200 mm

RUBINETTERIA / TAPS (pag. 227)



4 FORI
Four-hole tap set



3 FORI
Three-hole tap set

Colonna di scarico con erogatore
Overflow drain inclusive of fill spout



550 mm



Getti whirlpool
Whirlpool jets



Rubinetteria 4 fori
Four-hole tap set



Faro Cromoterapia
Chromotherapy LED light