


level

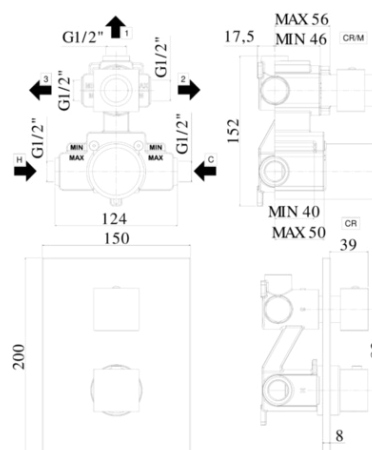

DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico incasso doccia (3 uscite) completo di:
 - piastra 150x200mm
 - attacchi 1/2"G
- Concealed thermostatic shower mixer (3 outlets) complete with:
 - wall plate 150x200mm
 - 1/2"G connections

FINITURE | FINISHES

LEQ 519

CR- Cromo | Chrome

CR/M- Cromo con piastra acciaio inox | Chrome with stainless steel wall plate
ST/M- Steel looking con piastra acciaio inox | Steel looking with stainless steel wall plate

ZPRO 074

- CR- Cromo
- ST- Steel looking

ARTICOLO | ARTICLE

LEQ 519..

- con cartuccia deviatore (3 uscite + 3 posizioni intermedie con stop)
- with diverter cartridge (3 outlets + 3 stop intermediate positions)

ZPRO 074..

- Prolunga per art. 519
- H20mm

RAPPORTO PROVA PORTATA | FLOW RATE REPORT

		Pressione / Pressure (bar)									
		Uscita outlet	0,5	1	1.5	2	2.5	3	3.5	4	4.5
Portata / Flow rate (l / min)	uscita sopra - up outlet	6.2	9.4	11.7	13.7	15.8	17.4	19	20.3	21.7	22.8
	uscita destra - right outlet	6.48	9.66	12.07	14.08	15.9	17.5	19.06	20.47	21.79	22.98
	uscita sinistra - left outlet	6.31	9.47	11.75	13.78	15.94	17.68	19.16	20.41	21.83	23

DOCUMENTI TECNICI | TECHNICAL DOCUMENTS

DIAGRAMMA
PORTATA 1ISTRUZIONI
INSTALLAZIONEESPLOSO
RICAMBI
LEQ 519

Sito Web



www.paffoni.it